arXiv:1304.5883v1 [physics.plasm-ph] 22 Apr 2013

A $1/t$ damped electrostatic electron plasma wave

Hua-sheng Xie*[1]

[1] *Institute for Fusion Theory and Simulation, Department of Physics,*
Zhejiang University, Hangzhou, 310027, People's Republic of China

(Dated: April 23, 2013)

In an electron plasma, besides the exponentially Landau damped electron plasma waves, there can also exist modes, namely the ballistic or Case-Van Kampen modes, that usually decay faster (say, $\sim \exp(-t^2)$) than the linear Landau damping. In this paper, a slower (namely $\sim 1/t$) damped mode is considered. The latter resolves the paradox of why Landau damping is difficult to realize in the numerical simulations based solely on the Vlasov-Ampere (V-A) equations, even though the modes have the same dispersion properties as that obtained from the Vlasov-Poisson equations. The mode of interest here corresponds to a residual mode of the V-A system, and its spectrum is also discussed.

PACS numbers: 52.35.Fp, 52.25.Dg, 52.65.-y, 52.30.-q

I. INTRODUCTION

The evolution of linear electron plasma wave perturbations in an unmagnetized plasma is generally determined by an initial-condition independent part (the normal mode) governed by a dispersion relation and an initial-condition dependent, or transient, part. The former is Landau damped[1] and decays exponentially. Van Kampen[2] and Case[3] showed that there can exist other modes, namely the ballistic or Case-Van Kampen modes. These are undamped in the sense that there are no solution of the linear Vlasov-Poisson equation with $\Im(\omega) < 0$ for the harmonic perturbation $\sim \exp(-i\omega t)$, where ω is the mode frequency. However, because of phase mixing (or the Riemann-Lebesgue lemma), the perturbations are still damped when all such modes are considered. The Case-Van Kampen modes have been investigated numerically and analytically, and interesting and important results have been found[4–8]. For example, Ng *et al.*[4, 5] found that the continuous Case-Van Kampen spectrum can disappear and be replaced by a discrete spectrum close to the Landau solution. Recently, Bratanov *et al.*[6, 7] reconsidered the problem and new insights on the relation between the Landau and the Case-Van Kampen modes were found.

The ballistic modes usually decay faster than Landau damping, especially when the initial perturbation is an entire function [9, 10]. For example, for the initial perturbation $\delta\hat{f}_0 = A_0 \exp[-(u-u_a)^2/u_b^2]$, where $|u_a| \gg (|u_b|, |\omega_r/k|)$, the ballistic mode decays like $\exp(-iku_a t - k^2 u_b^2 t^2)$ [11]. As a result, the asymptotic behavior of the plasma is determined by the Landau damped normal modes. The ballistic modes are thus ignored in most studies on plasma waves. Since they are short lived, the ballistic modes are also difficult to find in the experiments. However, there can exist slowly (relative to that of Landau) damped ballistic modes if the initial perturbations are not entire functions.

In this paper, we are interested in an algebraic decay mode excited by the initial perturbation

$$\delta\hat{f}_0 = \begin{cases} A_0, & \text{for } |u-u_a| \le u_b, \\ 0, & \text{otherwise,} \end{cases} \tag{1}$$

which is not an entire function. Asymptotically the corresponding ballistic mode (1) behaves like [11]

$$\propto \frac{1}{t}\sin(ku_b t)\exp(-iku_a t), \tag{2}$$

so that it decays like $1/t$. Our main purpose here is follow the evolution of such a slowly decaying ballistic mode. Since it is difficult to obtain the asymptotic behavior with the standard eigenvalue formulation, we shall consider the initial value problem.

In numerical simulations of electrostatic waves in plasmas, the Vlasov-Ampere (V-A) equations are often more convenient to use than the Vlasov-Poisson (V-P) equations since the Poisson's equation is elliptic. However, when considering electrostatic one-dimensional (ES1D) problems in Vlasov plasmas, the results from the V-A system may violate the Gauss's law. To overcome this problem in their numerical simulation of Landau damping, Horne and Freeman[12] used the V-P equations for the first few steps of the numerical integration, before continuing with the V-A equations. Here we show that the V-A system alone, i.e., without the Horne-Freeman Poisson start, can also yield solutions that are equivalent to that from the V-P system. Our result also explains why it is difficult to obtain Landau damping using the V-A system.

---

*Email: huashengxie@gmail.com

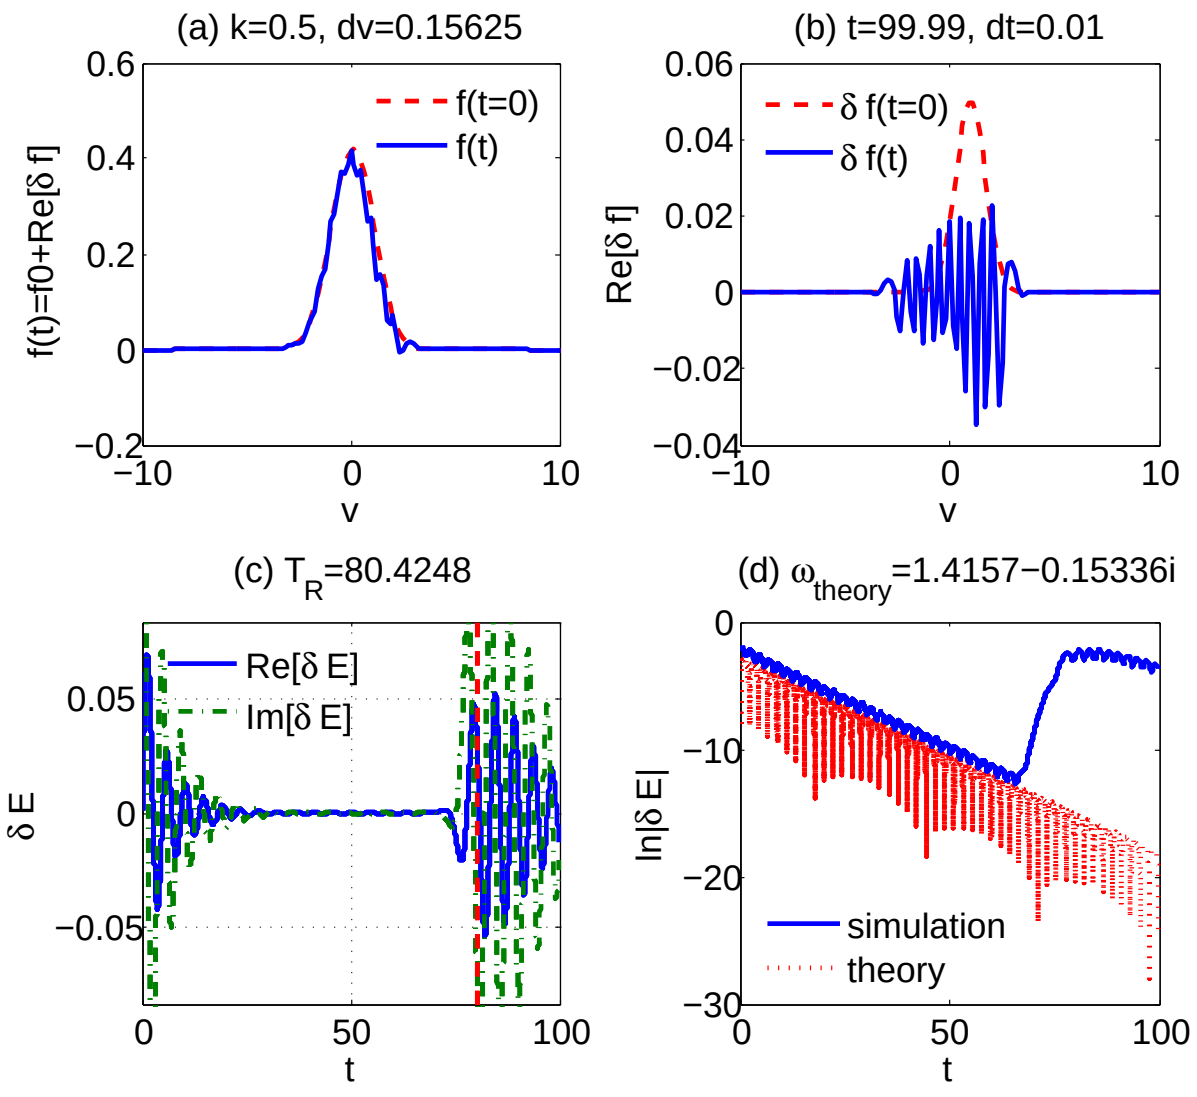

FIG. 1: Benchmark of the Landau damping solution.

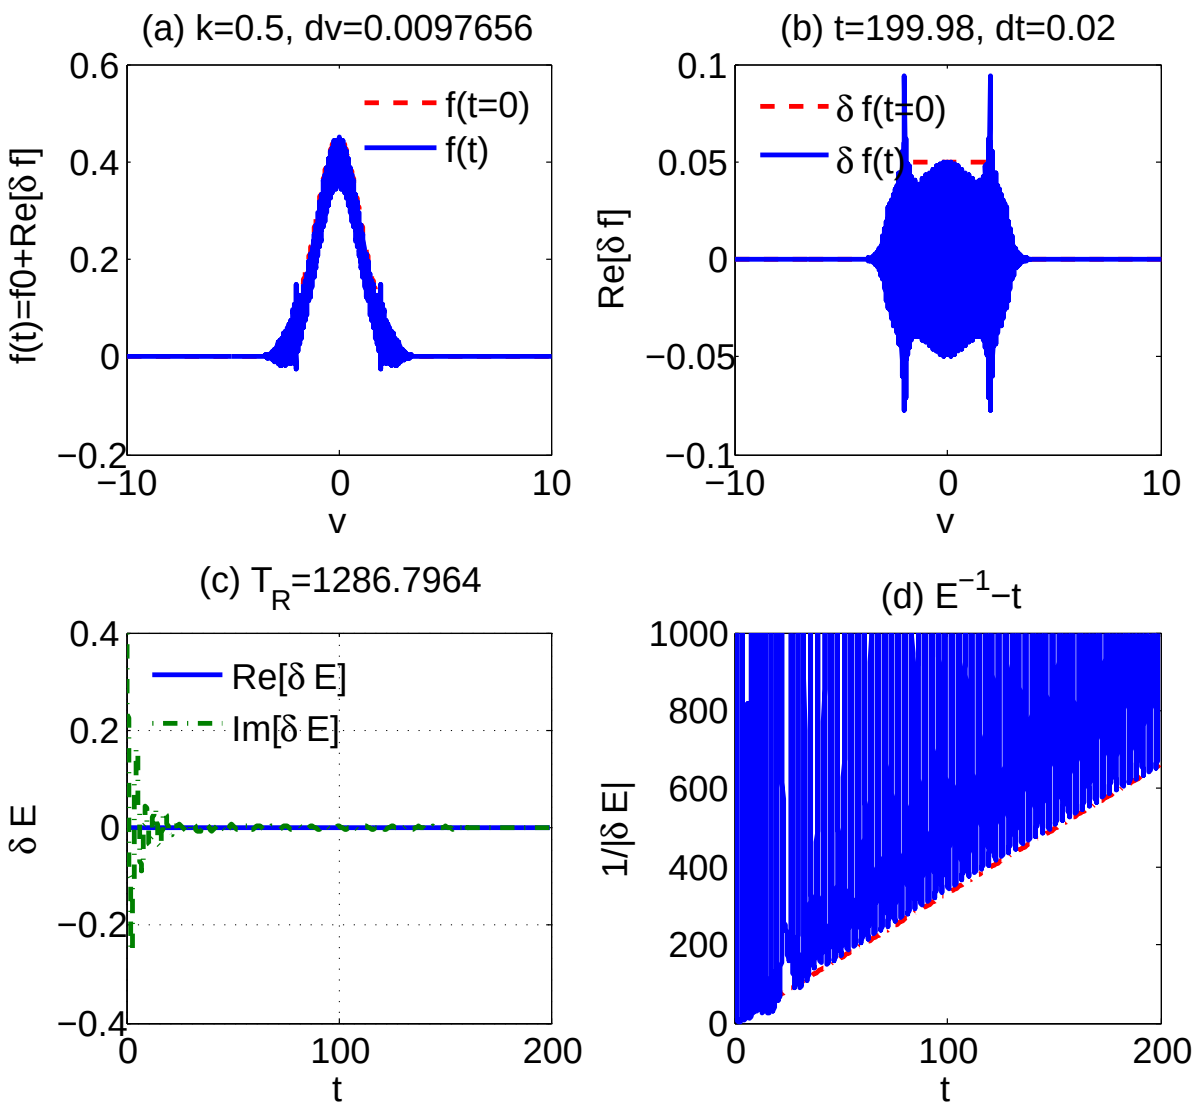

FIG. 2: Simulation of the $1/t$ decay ballistic mode.

II. SIMULATION OF THE $1/t$-DECAY BALLISTIC MODE

The normalized linear Vlasov-Poisson system is given by

$$\begin{cases} \partial_t \delta f = -ikv\delta f + \delta E \partial_v f_0, \\ ik\delta E = -\int \delta f dv. \end{cases} \tag{3}$$

where $f_0 = \exp(-v^2/2)/\sqrt{2\pi}$.

We solve (3) as an initial value problem from $t = 0$ to $t_{\text{end}} = N_t \Delta t$ using a 4th-order Runge-Kutta scheme. The discrete velocity space is from $v_{\min}$ to $v_{\max}$. There are N_v uniform grids of size $\Delta v = (v_{\max} - v_{\min})/N_v$.

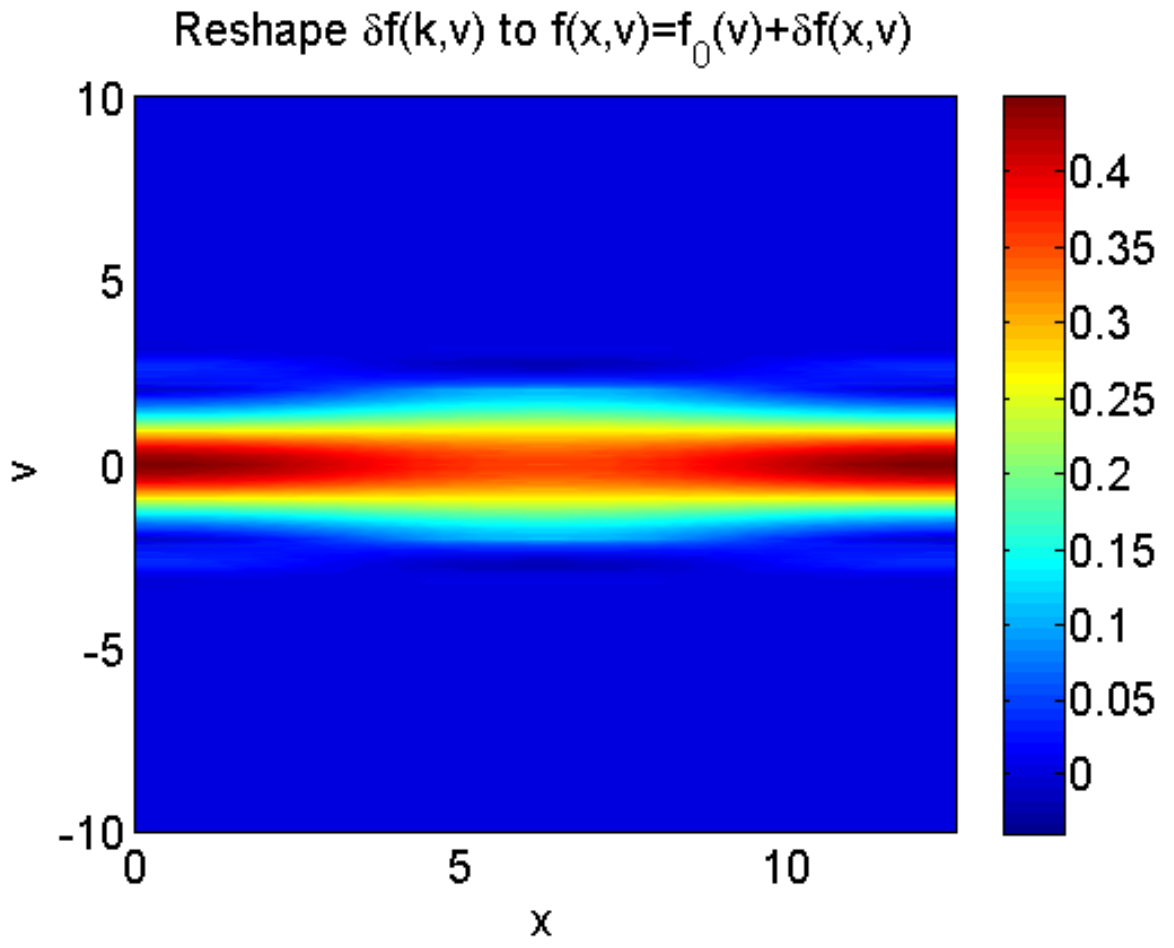

FIG. 3: Reshape $\delta f(k, v)$ to $f(x, v)$ of the Fig. 2 ballistic simulation result.

As mentioned, for most initial perturbations $\delta f(t = 0)$ or $\delta E(t = 0)$, the asymptotic behavior of $\delta E(t)$ is determined by the normal mode that is Landau damped. We shall first verify this solution. For, $k = 0.5$, the least damped Landau solution is $\omega_{\text{theory}} = \omega_r + i\gamma = 1.4157 - 0.1534i$. We use as initial perturbation a Gaussian δf with $A_0 = 0.05$, $u_a = 1.0$, and $u_b = 1.0$. The electric field $\delta E(t = 0)$ and $\delta E(t)$ can be obtained from the Poisson equation using the initially given and the calculated δf, respectively. The simulation results are shown in Fig. 1. We can see in the panel (d) that the simulated curve for Landau damping matches well with the theory. With $dt = 0.01$ accuracy, we have $\omega_{\text{simulation}} = 1.42 - 0.15i$. A non-physical recurrence effect (the Poincaré recurrence) can also be seen in the panels (c) and (d) at $T_R = 2\pi/k\Delta v$, which is due to the discreteness of the velocity space [13].

The $1/t$ damped ballistic mode from the initial perturbation (1) can be seen in Fig. 2 for $A_0 = 0.05$, $u_a = 0.0$, and $u_b = 2.0$. As reference, the red dashed line in the panel (d) is for $y = 3.3x$. We see that $|\delta E|$ decays as c/t, as analytically predicted in (2). Note that the constant c depends on A_0. To avoid the non-physical recurrence effect, we have used a very small Δv in this case.

In the above we have obtained the $1/t$ damped ballistic mode from the V-P system. Our linear simulation was carried out in the k-space. For completeness, we give in Fig. 3 the corresponding (x, v) phase space by direct mapping of Fig. 2 using the relation $f(x, v) = f_0(v) + \Re[\delta f(k, v)e^{ikx}]$.

III. ANSWER TO THE ES1D VLASOV-AMPERE PARADOX

We now consider the ES1D Vlasov-Ampere paradox described in the Introduction.

A. E modes

The Poisson's equation in (3) is now replaced by the Ampere's law

$$\partial_t \delta E = \int v\delta f dv. \tag{4}$$

From the charge continuity equation $\partial_t\rho + \partial_x J = 0$, it is easy to show that the V-A and V-P systems are equivalent if the Poisson's equation is used to supplement the initial condition in the V-A system, as discussed above. The dispersion relation from the V-A system is

$$D_{\rm VA}(\omega,k) \equiv \omega + \int \frac{v\partial f_0/\partial v}{\omega - kv}dv = 0, \tag{5}$$

and that from the for the V-P system is

$$D_{\rm VP}(\omega,k) \equiv k + \int \frac{\partial f_0/\partial v}{\omega - kv}dv = 0. \tag{6}$$

It is readily shown that (5) and (6) are equivalent, and they should thus both yield the normal modes given by the dispersion relation, which is independent of the initial condition. That is, one should also be able to get the Landau damped solutions from the V-A equations without using the Poisson start. However, existing simulations indicate that it is difficult [12].

In view of the above discussion, we now show that the ballistic mode (here we mean modes related to the initial perturbation, not necessarily that of the traditional definition $\omega = ku$) is the key factor in this paradox, i.e., the asymptotic behavior of the V-A system is mainly determined by the ballistic mode, instead of by the normal mode as for the V-P system.

Applying Laplace transform (L_p) in time and Fourier transform (F_r) in space to the V-A system, we can get

$$\begin{aligned}\delta E(t,k) &= L_p^{-1}\delta\hat{E}(\omega,k) \\ &= \int_{C_\omega}\frac{e^{-i\omega t}d\omega}{2\pi}\Big[\int du\frac{u\delta f_k(0)}{(\omega-ku)D(\omega,k)} - \frac{\delta E_k(0)}{D(\omega,k)}\Big]\end{aligned} \tag{7}$$

and for the V-P system we get

$$\delta E(t,k) = \int_{C_\omega}\frac{e^{-i\omega t}d\omega}{2\pi}\Big[\int du\frac{\delta f_k(0)}{(\omega-ku)D(\omega,k)}\Big]. \tag{8}$$

We are interested in the asymptotic behavior, so that only the $\omega = ku$ pole and the maximum-$\Im\omega_m$ normal mode are kept. From (7) we have,

$$\begin{aligned}\lim_{t\to\infty}\delta E &= \frac{1}{2\pi}\int_{u_L}du\Big[\underbrace{\frac{ue^{-ikut}\delta f_k(0)}{D_{\rm VA}(ku,k)}}_{\text{ballistic part}} + \underbrace{\frac{ue^{-i\omega_m t}}{(\omega_m - ku)\partial_{\omega_m}D}}_{\text{Landau part}}\Big] \\ &\quad \underbrace{-\int_{C_\omega}\frac{e^{-i\omega t}d\omega}{2\pi}\frac{\delta E_k(0)}{D_{\rm VA}(\omega,k)}}_{\text{initial }\delta E\text{ part}}.\end{aligned} \tag{9}$$

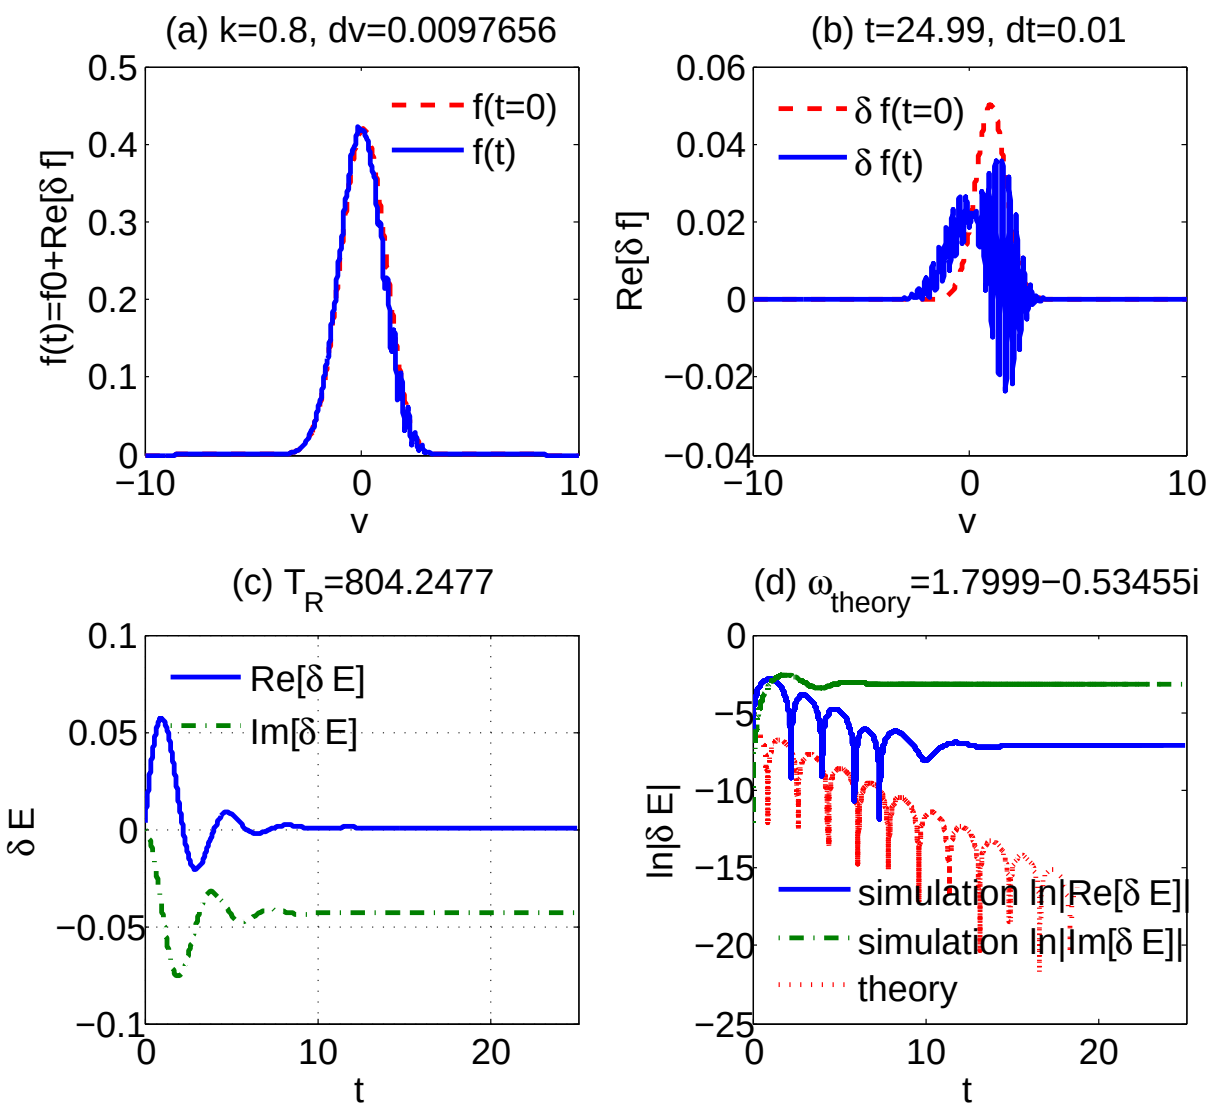

FIG. 4: V-A simulation of the residual E mode

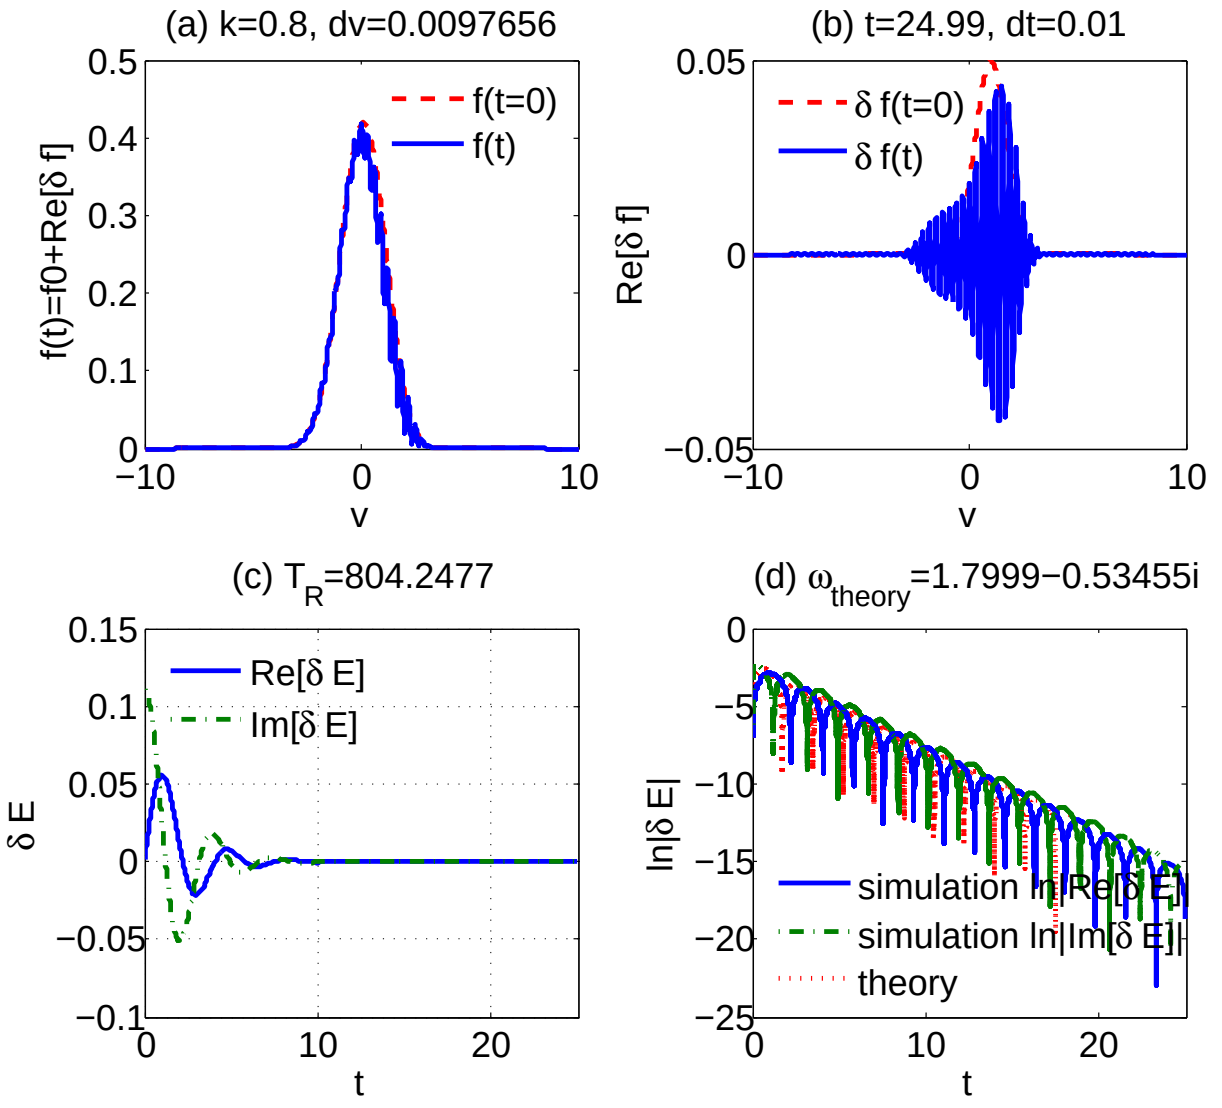

FIG. 5: V-A simulation of Landau damping using Poisson start

From (8) we have

$$\lim_{t\to\infty}\delta E = \frac{1}{2\pi}\int_{u_L}du\Big[\underbrace{\frac{e^{-ikut}\delta f_k(0)}{D_{\rm VP}(ku,k)}}_{\text{ballistic part}} + \underbrace{\frac{e^{-i\omega_m t}}{(\omega_m - ku)\partial_{\omega_m}D}}_{\text{Landau part}}\Big]. \tag{10}$$

Noting the relation $kD_{\rm VA} = \omega D_{\rm VP}$, we can see that the main difference between (11) and (10) is in the initial δE, or $\delta E(0)$, which is a constant. To see the typical asymptotic behavior, we let $D_{\rm VA} \approx \omega$ in the δE part of the integral and obtain the residual mode

$$\lim_{t\to\infty}[\delta E_{\rm VA}(t) - \delta E_{\rm VP}(t) + \delta E_{\rm Poisson}(0)] \propto \delta E(0). \tag{11}$$

On the other hand, if we treat $D_{\rm VA}$ as constant, we

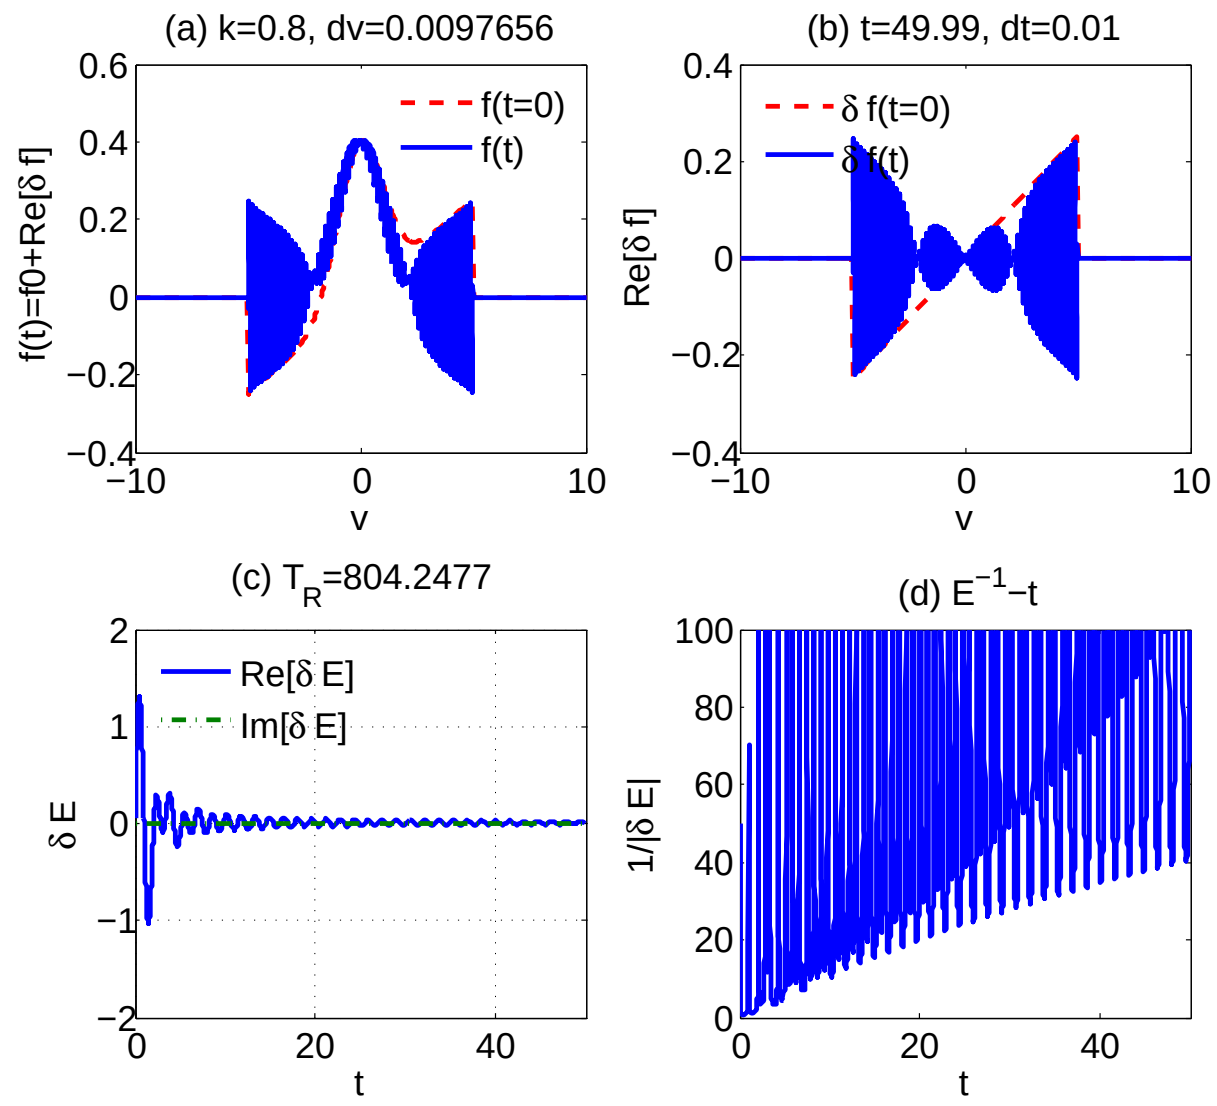

FIG. 6: V-A simulation of the E mode using initial perturbation (12)

will get $\lim_{t\to\infty}(\delta E_{\rm VA} - \delta E_{\rm VP}) \propto 1/t$. In both cases, Landau damping is not evident. Similar to the ballistic mode, this mode is also from the initial perturbation and can be considered as a Case-Van Kampen mode. We shall call it the E mode, in order to distinguish it from ballistic mode.

Using (11), one can separate the Landau and the residual E modes via a novel setup and diagnostics strategy. An example of separating the Landau and E modes is given in Fig. 4 for $\delta E(0) = 0.02$ and the same initial δf perturbation as in Fig. 1. In the panels (c) and (d), the real and imaginary parts of δE can be seen as the Landau and E modes, respectively. If $\delta E(0)$ is purely imaginary, the opposite holds. However, in practical situations it may be difficult to separate the Landau and E modes, especially in experiments or nonlinear simulations. Moreover, other profiles of $\delta f(0)$ or $\delta E(0)$ can also lead to different results. For example, if $u_a = 0$ instead of $u_a = 1.0$, the Landau damping in the above simulation would vanish. That is, as expected, the result is sensitive to the initial perturbations.

The results for a V-A simulation of Landau damping using a Poisson start is given in Fig. 5. The parameters are the same as that for Fig. 4, except that a V-P run is added in the initial i_t time step(s). In this linear simulation, $i_t = 1$ is sufficient. For nonlinear simulations one may need more time steps [12]. In Fig. 5, we can see that both the real and imaginary parts of δE match the Landau result.

In the V-A simulation, we found that the residual E mode is dominant. The initial perturbation (1) also cannot prevent it. However, we found that the perturbation

$$\delta f(0) = \begin{cases} A_0 u, & \text{for } |u-u_a| \le u_b, \\ 0, & \text{otherwise,} \end{cases} \tag{12}$$

can result in a roughly-$1/t$ decay mode when $u_a = 0$, as shown in Fig. 6 for $u_b = 5.0$.

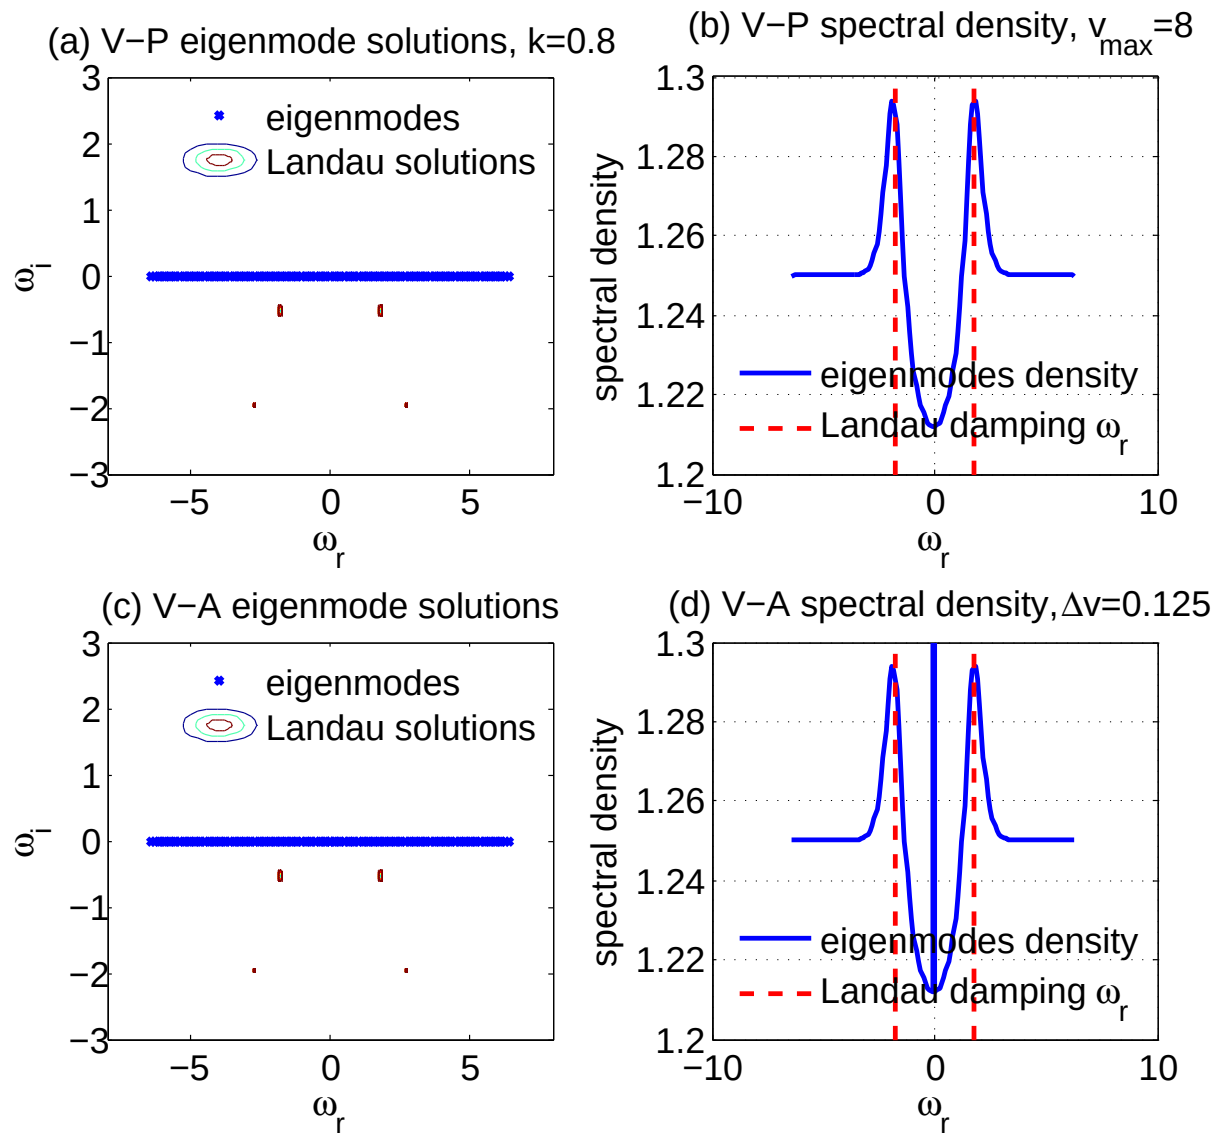

FIG. 7: Eigenmodes in V-A and the V-P systems with the comparison to the Landau damping normal modes

B. Eigenmodes in the V-A system

There are also other phenomena related to Landau damping. For example, it is known that the Landau damped normal mode is not an eigenmode in the V-P system, although a growing normal mode can be an eigenmode (see, e.g., Ref. 4). Bratanov[6] recently reported new numerical investigations of the connection between the Case-Van Kampen eigenmode and the Landau normal mode. It is found that there is a spectral density accumulation around the real frequency of the Landau-damped mode.

If we rewrite the governing equations into the matrix form $M \cdot \vec{F} = \omega \vec{F}$, with $\partial_t = -i\omega$. The eigenvector $\vec{F}$ for the V-P system is $\vec{F} = \{F_j\} = \{\delta f(v_j)\}$, where $v_j = v_{\rm min} + (j-1)\Delta v$ and $j = 1, 2, 3, ..., N_v + 1$. Bratanov[6] found that although all the eigenvalue solutions of $\vec{F}$ are undamped, the integral of them, which is related to δE, can yield Landau damping because of phase mixing, similar to the Van Kampen modes. This can also be seen in the panels (a) and (b) in Fig. 7.

The question is then: what if δE is also contained in the eigenvector $\vec{F}$? Will it give the Landau solution directly, so that the Landau damped mode can also be an eigenmode? The V-A system can combine δE into $\vec{F}$ directly. The eigenvector of the V-A system then becomes

$$\vec{F} = \{F_j\} = \begin{cases} \delta f(v_j), & j = 1, 2, 3, \cdots, N+1, \\ \delta E, & j = N+2. \end{cases} \tag{13}$$

Using (3) and (4), we can easily find the elements of the eigenvalue matrices M for the V-A and V-P systems, respectively. The solutions are shown in Fig. 7. However, we see that there is no eigenmode, and the normal modes are overlapping. That is, our result also indicates that the Landau damped mode in the V-A system is not an eigenmode. Apparently, the only difference between the V-A and V-P systems is in the spectral density around $\omega_r = 0$: there is an extra accumulating point at $\omega_r = 0$ of the V-A system [compare the panels (b) and (d)]. Noting (11), we can attribute this new accumulating point to the E mode, in particular the constant residual E mode.

IV. SUMMARY

In this paper, we have verified via linear simulation the existence of an algebraic $1/t$ decay ballistic mode in the ES1D kinetic plasma system. However, collisional and nonlinear effects are precluded. Further investigation (say, using particle-in-cell simulation or kinetic theory) including these effects as well as a more realistic initial pulse, are still needed in order to see if such a mode can indeed be produced experimentally. We have also resolved the ES1D V-A paradox and found an interesting mode, namely the residual E mode, which does not seem to have been investigated earlier. However, we note that, when considering the vibrations of a plasma in an external eletric field, Landau[1] found analogous results as that in the V-A system.

V. ACKNOWLEDGEMENTS

The author would like to thank M. Y. Yu for improving the manuscript and helpful discussions. Comments from Y. Xiao are also appreciated.

---

[1] L. D. Landau, J. Phys. (USSR) **10**, 25 (1946).
[2] N. Van Kampen, Physica **21**, 949 (1955).
[3] K. M. Case, Annals of Phys. **7**, 349 (1959).
[4] C. S. Ng, A. Bhattacharjee and F. Skiff, Phys. Rev. Lett. **83**, 1974 (1999).
[5] C. S. Ng, A. Bhattacharjee and F. Skiff, Phys. Rev. Lett. **92**, 065002 (2004).
[6] V. Bratanov, F. Jenko, D. Hatch and S. Brunner, Phys. Plasmas, **20**, 022108 (2013).
[7] V. Bratanov, "Landau and Van Kampen Spectra in Discrete Kinetic Plasma Systems", Master thesis, LMU Munich, `http://www.theorie.physik.uni-muenchen.de/TMP/theses/thesis_bratanov.pdf`, 2012.
[8] C. Mouhot and C. Villani, Acta Mathematica, **207**, 29 (2011).
[9] J. D. Jackson, J. Nucl. Energy **1**, 171 (1960).
[10] T. Stix, *Waves in Plasmas* (AIP, New York, 1992).
[11] L. Chen, *Waves and Instabilities of Plasmas* (World Scientific, 1987).
[12] R. B. Horne and M. P. Freeman, J. Comput. Phys. **171**, 182 (2001).
[13] C. Z. Cheng and G. Knorr, J. Comput. Phys. **22**, 330 (1976).